




The Sound That Will Move You



RBS-52

Reference Bookshelf Speaker

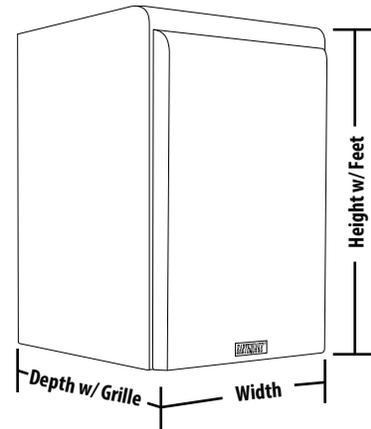

Height w/ Feet	12-3/4" (324mm)
Width	9" (228mm)
Depth w/ Grille	11-1/8" (292mm)

Close ups:



Intended Use:

Contractors, Custom Installers and Retailers
 Kitchens, Hall-ways, Offices, Lobbies
 New Construction & Retrofit Applications
 Home Theater & 2-Channel/Music System

Features:

1" Silk Dome NEO Tweeter
 5.25" Low-mass Rigid Carbon Fiber Cone
 PistonMax™ Technology
 Gold Plated Terminals
 Enforced Bass Reflex Enclosure
 Removable Self-centering Magnetic Grille

Objective :

The RBS-52 was designed to deliver a studio quality sound reproduce along with great aesthetics.

No short cuts were taken in the assemblage of the RBS-52. That is why they were equipped with 25mm silk dome tweeters to allow faster response, as well as higher frequency range. The 5.25" mid-bass driver has a low mass rigid carbon fiber cone and a large surround that is glued to the basket using Earthquake's patented PistonMax Technology to provide you with 25% more accurate sound pressure as well as low harmonic distortion.

Two rounded ports have been added to the back of the finely finished matte black cabinet to enhance the low frequency and precisely tune it to 40Hz.

Specifications:

HF Driver	Silk Dome NEO Tweeter
LF/MF Driver	5.25" Carbon Fiber w/ PistonMax
Frequency Response	30Hz - 20kHz
Sensitivity	90dB
Amp Power	50-300 W
Nomial Impedance	8 Ohm
MSRP	\$399/Pair