

## Designed For The Pro. Ready For The Elements.

The Earthquake AWS6-B70 is a robust 6.5-inch outdoor speaker engineered to deliver premium audio performance in demanding commercial environments. Combining high-fidelity sound reproduction with rugged durability, the AWS6-B70 is designed for installers seeking reliability for any outdoor audio system.

Engineered to survive the elements, the AWS6-B70 is built to withstand the unpredictability of nature. Featuring an IPX4 rating, the enclosure is splash-proof and weather-resistant from any direction. As commercial spaces increasingly extend into the outdoors—from sprawling restaurant patios to hotel courtyards and theme parks—the demand for sound that is both immersive and resilient has never been higher. The UV-resistant cabinet ensures that the speaker maintains its aesthetic appeal even after prolonged outdoor exposure.

Designed for versatility with the system integrator in mind, the AWS6-B70 features a built-in, adjustable multi-tap transformer for 70V and 100V distributed audio systems, allowing for long cable runs and daisy-chaining without signal degradation.



### Key Features

- 2-way indoor/outdoor all-season monitor speaker
- Built-in 70V/100V multi-tap transformer for commercial audio applications
- 8-Ohm bypass for home audio applications
- Rust-proof screws, brackets, and grilles
- Durable molded high-temperature PVC enclosure
- Excellent for all applications including marine
- UV-treated for high environmental endurance
- Lightweight polypropylene woofer cone with Butyl rubber surround
- 3/4 in. (20mm) PEI Mylar dome tweeter
- 1 in. (25mm) ASV voice coil
- Paintable grille and enclosure to match and decor
- Versatile surface mount bracket for vertical, horizontal, and corner placement
- Molded enclosure feet for bookshelf placement
- 180° directional positioning for optimal dispersion
- Removable port plug for extended bass response
- Gold-plated binding posts



The Sound That Will Move You


# AWS6-B70

## Specifications

<b>Woofers:</b>	6.5 in. (165mm), 25mm ASV voice coil
<b>Tweeter:</b>	3/4 in. (20mm)
<b>Woofers Material:</b>	Cone: Polypropylene Surround: Butyl rubber
<b>Tweeter Material:</b>	PEI Mylar dome
<b>Frequency Response:</b>	65Hz-20kHz
<b>Sensitivity:</b>	96dB 1W/1M
<b>Transformer Taps:</b>	70V: 30W, 15W, 7.5W, 3.5W 100V: 30W, 15W, 7.5W 8-Ohm Bypass
<b>Power Handling:</b>	8-Ohm: 200W Max 70V/100V: 30W Max
<b>Ingress Protection Rating:</b>	IPX4
<b>Enclosure Material:</b>	PVC (Polyvinyl Chloride)
<b>Enclosure Finish:</b>	Matte black
<b>Bracket Material:</b>	Aluminum
<b>Grille Material:</b>	Aluminum
<b>Mounting Hardware Material:</b>	Aluminum
<b>Overall Dimensions (H x W x D):</b>	11.5 in. x 8.5 in. x 7.12 in. 292mm x 216mm x 181mm
<b>Net Weight:</b>	8.22 lb / 3.73 kg

## Applications

- Pool areas
- Hotels
- Theme Parks
- Retail centers
- Schools
- Houses of worship
- Restaurants / Bars

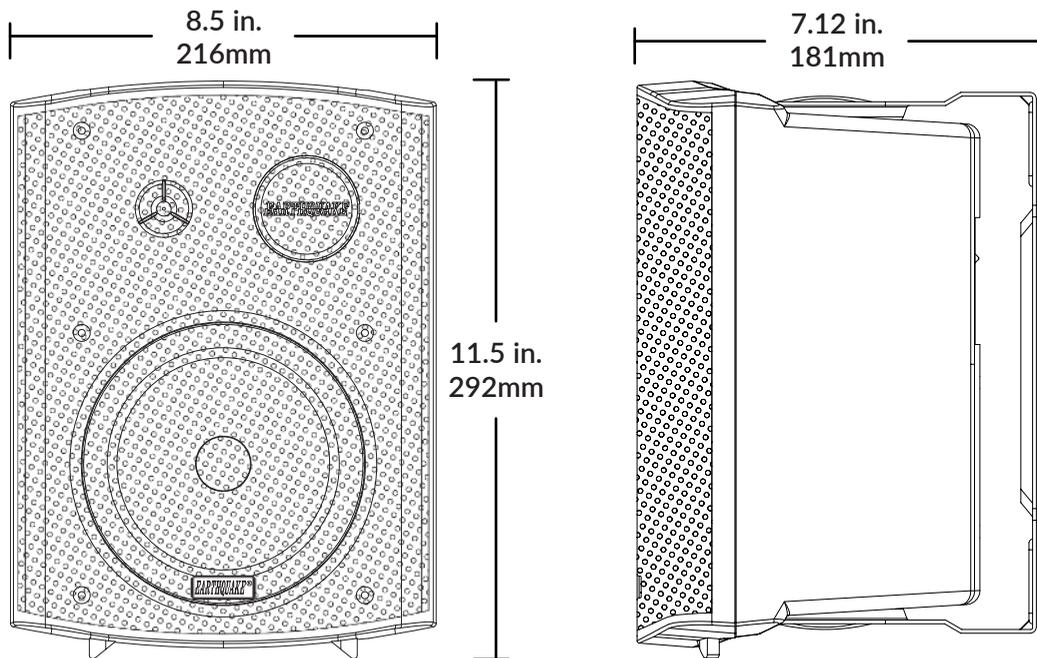

**AWS6-B70**  
**MSRP: \$375/PIECE**



### Earthquake Sound Corporation

2727 McCone Avenue, Hayward, CA 94545 • www.earthquakesound.com • 510-732-1000

©2025 Earthquake Sound Corporation

All copyrighted, trademarked, and patented elements mentioned herein are the sole property of Earthquake Sound Corporation.